


## Diffuse sensors with background suppression

## OHDK 14N5101/S35A

### dimension drawing

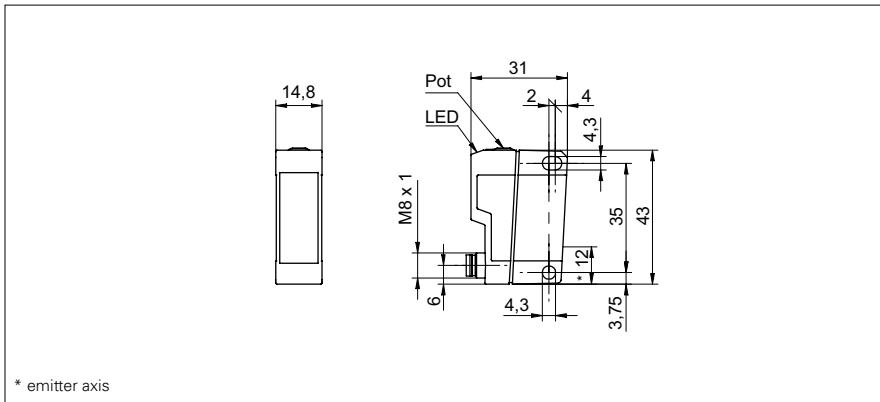

### general data

type	background suppression
light source	pulsed red laser diode
sensing distance $T_w$	20 ... 350 mm
sensing range $T_b$ (at $T_w$ max.)	20 ... 350 mm
sensing range $T_b$ (at $T_w$ min.)	5 ... 20 mm
repeat accuracy	< 0,2 mm at laser focus
power on indication	LED green
light indicator	LED yellow
sensing distance adjustment	mechanical, 9 turn
laser class	2
distance to focus	115 mm
wave length	650 nm

### electrical data

response time / release time	< 0,5 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	35 mA
current consumption typ.	25 mA
voltage drop $V_d$	< 2,2 VDC
output function	light / dark operate
output circuit	NPN
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

width / diameter	14,8 mm
height / length	43 mm
depth	31 mm
type	rectangular
housing material	plastic (ASA, MABS)
front (optics)	PMMA
connection types	connector M8 4 pin


### ambient conditions

operating temperature	-10 ... +50 °C
protection class	IP 67


### photo



### connection diagram

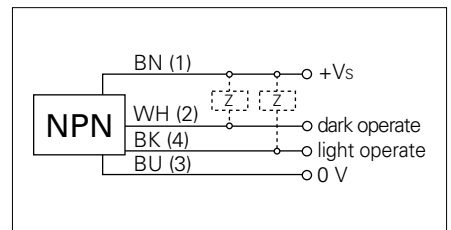


### laser warning

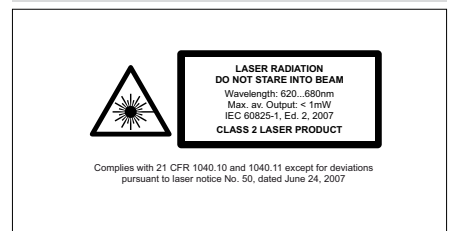

## Diffuse sensors with background suppression

## OHDK 14P5101/S35A

### dimension drawing

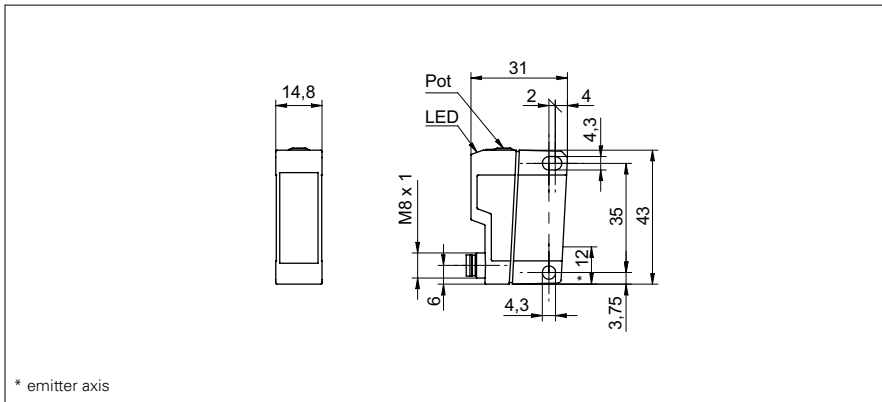

### general data

type	background suppression
light source	pulsed red laser diode
sensing distance $T_w$	20 ... 350 mm
sensing range $T_b$ (at $T_w$ max.)	20 ... 350 mm
sensing range $T_b$ (at $T_w$ min.)	5 ... 20 mm
repeat accuracy	< 0,2 mm at laser focus
power on indication	LED green
light indicator	LED yellow
sensing distance adjustment	mechanical, 9 turn
laser class	2
distance to focus	115 mm
wave length	650 nm

### electrical data

response time / release time	< 0,5 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	35 mA
current consumption typ.	25 mA
voltage drop $V_d$	< 2,2 VDC
output function	light / dark operate
output circuit	PNP
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

### mechanical data

width / diameter	14,8 mm
height / length	43 mm
depth	31 mm
type	rectangular
housing material	plastic (ASA, MABS)
front (optics)	PMMA
connection types	connector M8 4 pin


### ambient conditions

operating temperature	-10 ... +50 °C
protection class	IP 67


### photo



### connection diagram

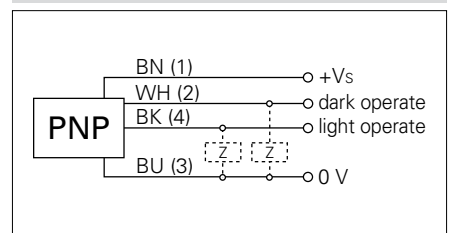

### laser warning

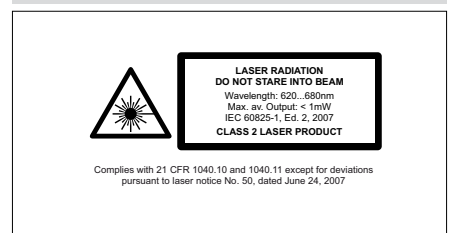

# EX-L200 SERIES

Related Information

- General terms and conditions..... F-17
- Sensor selection guide ..... P.251~
- Glossary of terms / General precautions... P.1359~ / P.1405
- About laser beam..... P.1403~

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- ENDOSCOPE
- LASER MARKERS
- PLC / TERMINALS
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS
- Selection Guide
- Amplifier Built-in
- Amplifier-separated

EX-L200



[panasonic-electric-works.net/sunx](http://panasonic-electric-works.net/sunx)



**Warning:** This product is classified as a Class 1 Laser Product in IEC / JIS standards and in FDA regulations (21 CFR 1040.10 and 1040.11). Do not look at the laser beam through optical system such as a lens.



## Built-in amplifier at this size? World smallest\* laser sensor

\* Based on research conducted by our company as of September 2010

### Introducing world smallest\* amplifier built-in laser sensor

\* Based on research conducted by our company as of September 2010

Due to the customized IC and optical design, high precision detection is fulfilled in a world smallest size with directivity and visibility achievable only by laser. The laser adopted is Class 1 (IEC / JIS / FDA) laser that is safe to use, so that there is no need to separate the areas of sensor usage.

#### THRU-BEAM TYPE

##### Minute object detection type **EX-L211**

Spread the beam and lower its density, thus even a minute object can be detected with a small change in the light received intensity. Spot size: 6 × 4 mm **0.236 × 0.157 in** approx. (Visual reference value at a sensing distance of 1 m **3.281 ft**)

##### Long sensing range type **EX-L212**

A long range detection of 3 m **9.843 ft** is achieved. High precision detection with minimum beam spread is possible even in a long range. Spot size: 8 × 5.5 mm **0.315 × 0.217 in** approx. (Visual reference value at a sensing distance of 1 m **3.281 ft**)

#### REFLECTIVE TYPE



##### Long sensing range type **EX-L291**

Achieving ease of installation and 4 m **13.123 ft** long sensing range. Spot size: 6 × 4 mm **0.236 × 0.157 in** approx. (Visual reference value at a sensing distance of 1 m **3.281 ft**)

#### SPOT REFLECTIVE TYPE


##### Minute object detection type **EX-L221**

Highly precise sensing with minimum 0.01 mm **0.0004 in** diameter. Many applications are possible due to the 300 mm **11.811 in** long sensing range. Spot size:  $\varnothing$ 1 mm **0.039 in** (Visual reference value at a sensing distance of 300 mm **11.811 in**)

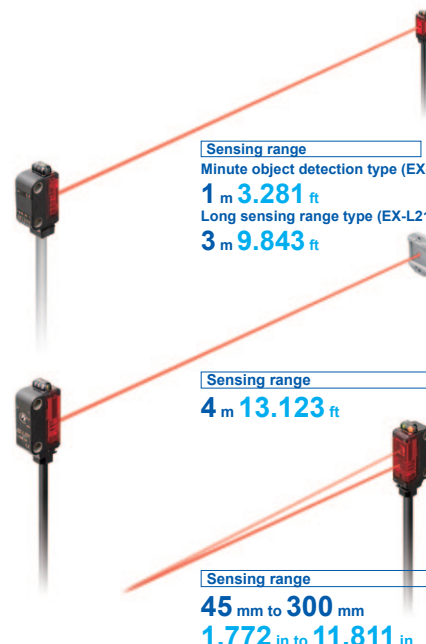


**APPLICATIONS**


**Detecting ICs that are out of position in multiple palettes**



**Confirming arrival of substrate**




**Determining cutting position of sheet**




**Checking protrusion of wafer**



**Determining electric parts position**



**Detecting O-ring**

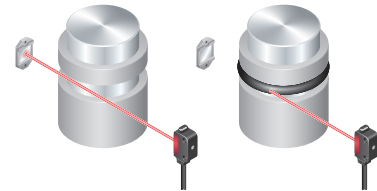

**HIGH PRECISION**


**Highly accurate detection** EX-L211/L221

**Suitable for positioning and minute object detection**

A repeatability of 0.02 mm **0.0008 in** or less at a range of from 100 to 200 mm **3.937 to 7.874 in** makes this type best suitable for positioning applications (**EX-L221**). Moreover, it boasts a top-class detection precision in the compact laser sensor category with the gold wire of  $\varnothing 0.01$  mm  **$\varnothing 0.0004$  in**.

Model No. (Minute object detection type)	Minimum sensing object (Typical)	Repeatability (Typical)
<b>EX-L211</b> (Thru-beam type)	$\varnothing 0.3$ mm <b><math>\varnothing 0.012</math> in</b>	0.01 mm <b>0.0004 in</b> or less
<b>EX-L221</b> (Reflective type)	$\varnothing 0.01$ mm <b><math>\varnothing 0.0004</math> in</b>	0.02 mm <b>0.0008 in</b> or less

\* Typical values when the sensitivity adjuster is optimally adjusted.

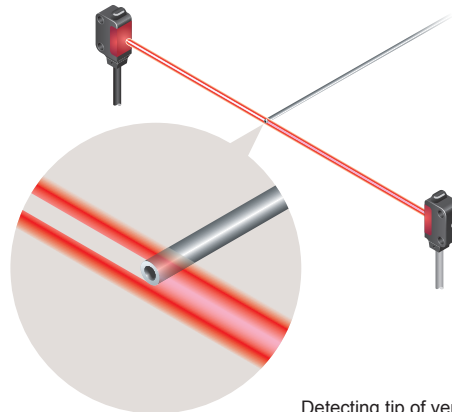

Detecting tip of very thin pipe

**Dependable technology yields high precision**

**Incorporating a high-precision aspheric glass lens**

Light aberrations are reduced and a high definition laser spot is possible by incorporating a molded aspheric glass lens.



**Small receiver aperture for precision detection**

EX-L211/L212

Errant beams are eliminated by the  $\varnothing 0.5$  mm  **$\varnothing 0.020$  in** receiver aperture. Only beams entering the aperture are used, making for high-precision sensing.



FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

ENDOSCOPE

LASER MARKERS

PLC / TERMINALS

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Amplifier-separated

EX-L200

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- ENDOSCOPE
- LASER MARKERS
- PLC / TERMINALS
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS


**EASY ALIGNMENT**

**Easy beam-axis alignment**

**EX-L211/L212**

Visual positioning is easy due to silhouetting a sensing object against a receiver.


Visually confirm the optimal receiver position, adjusting the beam axis by aligning the objects while watching the red spot on the beam alignment screen. The diagram on the right shows an example with the lead of a mechanical pencil being detected through visual adjustment.

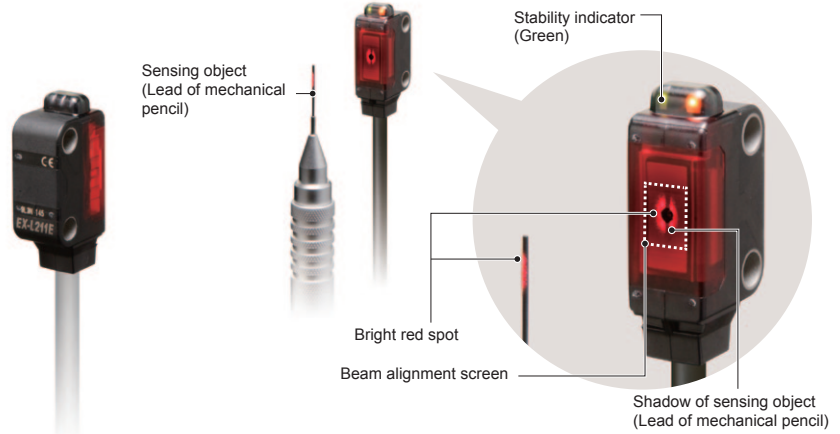

**EASY SETTING**

**Same mounting pitch as ultra-compact photoelectric sensor**

EX-L200 series has the same mounting pitch as ultra-compact photoelectric sensor EX-20 series so that the time taken in designing is saved.

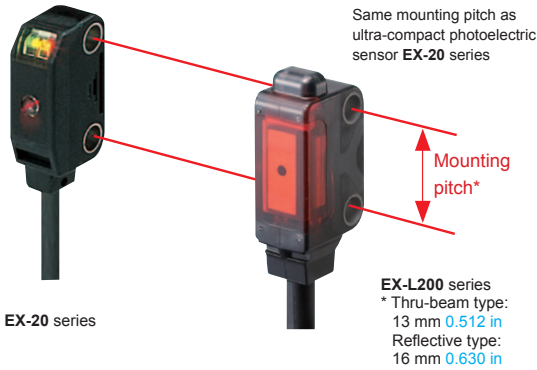

**ENVIRONMENTAL RESISTANCE**

**Strong against water and dust with protection structure IP67**

The sensor can be used even in environment where water or dust present because of its protection structure IP67.




**EASY TO USE**

**M3 screw used for secure tightening**

The mounting holes have metal sleeves inserted to prevent damage to the sensor due to over tightening of the screws. (Tightening torque: 0.5 N·m)

**Conductor thickness 1.5 times increased to make wiring easier**

The lead wire conductor's thickness is increased to 0.15 mm<sup>2</sup> from 0.1 mm<sup>2</sup> of the conventional ultra-compact photoelectric sensor. This makes it easier to perform crimping work on the cables for better workability. In addition, the tensile strength of the crimping area has become stronger.

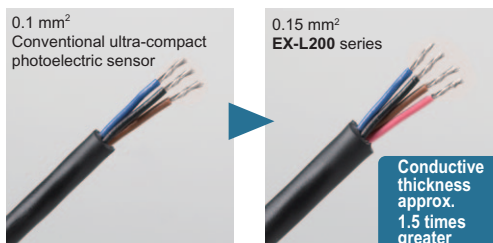

**Sensitivity adjuster EX-L211/L221/L291**


A sensitivity adjuster of world smallest size is incorporated to offer strong performance in minute detection or high precision detection.

**Low current consumption**

The laser light source contributes to low current consumption, as it is approx. 5 mA lower than a LED light source.

**Switchable output operation**





The output operation switching input enables the switching of Light-ON or Dark-ON in one unit. This prevents ordering mistake and reduces the maintenance of spare parts.

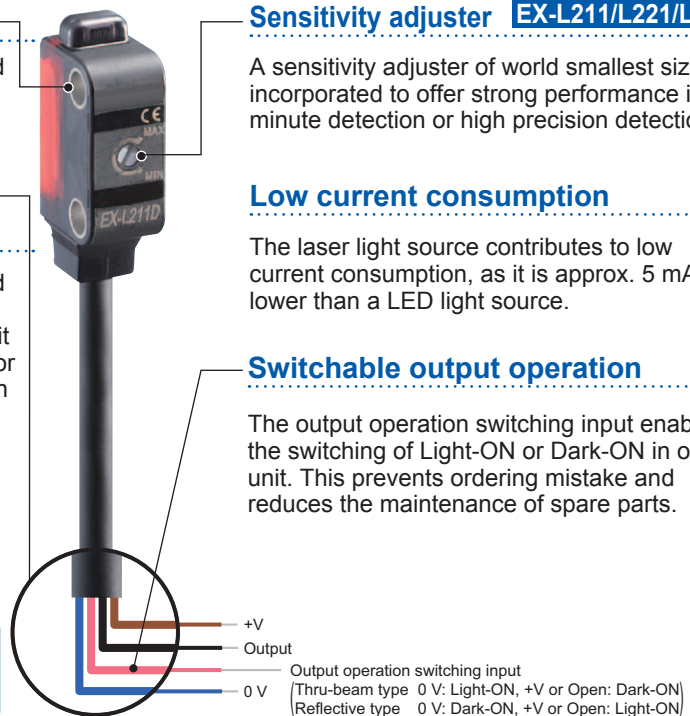

- Selection Guide
- Amplifier Built-in
- Amplifier-separated


**EX-L200**

**ORDER GUIDE**

Type		Appearance	Sensing range	Model No.		Emission spot size (Typical)	Sensitivity adjuster
				NPN output	PNP output		
Thru-beam	Minute object detection type		1 m <b>3.281 ft</b>	<b>EX-L211</b>	<b>EX-L211-P</b>	Approx. 6 × 4 mm <b>0.236 × 0.157 in</b> (at a sensing distance of 1 m <b>3.281 ft</b> )	Incorporated
	Long sensing range type		3 m <b>9.843 ft</b>	<b>EX-L212</b>	<b>EX-L212-P</b>	Approx. 8 × 5.5 mm <b>0.315 × 0.217 in</b> (at a sensing distance of 1 m <b>3.281 ft</b> )	—
Retroreflective	Long sensing range type		4 m <b>13.123 ft</b> (Note 2)	<b>EX-L291</b>	<b>EX-L291-P</b>	Approx. 6 × 4 mm <b>0.236 × 0.157 in</b> (at a sensing distance of 1 m <b>3.281 ft</b> )	Incorporated
Spot reflective	Minute object detection type		45 to 300 mm <b>1.772 to 11.811 in</b>	<b>EX-L221</b>	<b>EX-L221-P</b>	ø1 mm <b>ø0.039 in</b> or less (at a sensing distance of 300 mm <b>11.811 in</b> )	Incorporated

Notes: 1) The model No. with "E" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.  
(e.g.) Emitter of **EX-L211**: **EX-L211E**, Receiver of **EX-L211**: **EX-L211D**

2) The sensing range is the value for **RF-330** reflector. The sensing range represents the actual sensing range of the sensor. The sensing ranges itemized in "A" of the table below may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.



	RF-330 (Accessory)	RF-210 (Optional)	
		With PF-EXL2-1 polarizing filters *1	With PF-EXL2-1 polarizing filters *1
A	0 to 4 m <b>0 to 13.123 ft</b>	0 to 4 m <b>0 to 13.123 ft</b>	0 to 1.8 m <b>0 to 5.906 ft</b> 0 to 1.2 m <b>0 to 3.937 ft</b>
B	0.2 to 4 m <b>0.656 to 13.123 ft</b>	0.4 to 4 m <b>1.312 to 13.123 ft</b> *2	0.16 to 1.8 m <b>0.525 to 5.906 ft</b> 0.25 to 1.2 m <b>0.820 to 3.937 ft</b> *2

\*1 Refer to "OPTIONS" for the polarizing filter **PF-EXL2-1** and the reflector **RF-210**.

\*2 When positioning the reflector nearby, the angular characteristic become more narrow. Adjust the angle of a sensor or reflector.

**M8 pigtailed type and 5 m 16.404 ft cable length type**

M8 pigtailed type and 5 m **16.404 ft** cable length type (standard: 2 m **6.562 ft**) are also available.

When ordering these types, suffix "-J" for the M8 pigtailed type, "-C5" for the 5 m **16.404 ft** cable length type to the model No.

Please order the mating cable separately.

(e.g.) M8 pigtailed type of **EX-L211-P** is "**EX-L211-P-J**"


5 m **16.404 ft** cable length type of **EX-L211-P** is "**EX-L211-P-C5**"

· **Mating cable** (2 cables are required for the thru-beam type.)

Type	Model No.	Cable length
Straight	<b>CN-24A-C2</b>	2 m <b>6.562 ft</b>
	<b>CN-24A-C5</b>	5 m <b>16.404 ft</b>
Elbow	<b>CN-24AL-C2</b>	2 m <b>6.562 ft</b>
	<b>CN-24AL-C5</b>	5 m <b>16.404 ft</b>

**Mating cable**

- **CN-24A-C2** · **CN-24AL-C2**
- **CN-24A-C5** · **CN-24AL-C5**

**Package without reflector**

Retroreflective type is also available without the reflector.

Type	Model No.	
	NPN output	PNP output
Retroreflective type	<b>EX-L291-Y</b>	<b>EX-L291-P-Y</b>
M8 pigtailed type	<b>EX-L291-J-Y</b>	<b>EX-L291-P-J-Y</b>
5 m <b>16.404 ft</b> cable length type	<b>EX-L291-C5-Y</b>	<b>EX-L291-P-C5-Y</b>

**Accessories**

- **MS-EXL2-2** (Mounting plate for thru-beam type): 1 pc.
- **MS-EXL2-3** (Mounting plate for retroreflective / spot reflective type): 1 pc.
- **RF-330** (Reflector): 1 pc.

FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

ENDOSCOPE

LASER MARKERS

PLC / TERMINALS

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Amplifier-separated

EX-L200

**SPECIFICATIONS**

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

ENDOSCOPE

LASER MARKERS

PLC / TERMINALS

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide


Amplifier Built-in

Amplifier-separated

**EX-L200**

Item	Type	Thru-beam		Retroreflective	Spot reflective
		Minute object detection		Long sensing range	Minute object detection
		EX-L211	EX-L212	EX-L291	EX-L221
	NPN output	<b>EX-L211</b>	<b>EX-L212</b>	<b>EX-L291</b>	<b>EX-L221</b>
	PNP output	<b>EX-L211-P</b>	<b>EX-L212-P</b>	<b>EX-L291-P</b>	<b>EX-L221-P</b>
Sensing range		1 m <b>3.281 ft</b>	3 m <b>9.843 ft</b>	4 m <b>13.123 ft</b> (Note 2)	45 to 300 mm <b>1.772 to 11.811 in</b> (for non-gloss white paper 100 × 100mm <b>3.937 × 3.937 in</b> )
Emission spot size (Typical)		6 × 4 mm <b>0.236 × 0.157 in</b> (vertical × horizontal) (at a sensing distance of 1 m <b>3.281 ft</b> )	8 × 5.5 mm <b>0.315 × 0.217 in</b> (vertical × horizontal) (at a sensing distance of 1 m <b>3.281 ft</b> ) (Note 3)	6 × 4 mm <b>0.236 × 0.157 in</b> (vertical × horizontal) (at a sensing distance of 1 m <b>3.281 ft</b> ) (Note 3)	ø1 mm <b>0.039 in</b> or less (at a sensing distance of 300 mm <b>11.811 in</b> )
Sensing object		Opaque object of ø2 mm <b>ø0.079 in</b> or more	Opaque object of ø3 mm <b>ø0.118 in</b> or more	Opaque translucent object of ø25 mm <b>ø0.984 in</b> or more	Opaque, translucent or transparent object
Minimum sensing object (Typical) (Note 4)		Opaque object of ø0.3 mm <b>ø0.012 in</b>			Gold wire of ø0.01 mm <b>ø0.0004 in</b>
Hysteresis		20 % or less of operation distance			
Repeatability		Perpendicular to sensing axis: 0.05 mm <b>0.0020 in</b> or less		Perpendicular to sensing axis: 0.2 mm <b>0.0080 in</b> or less	
Repeatability (Typical) (perpendicular to sensing axis) (Note 4)		0.01 mm <b>0.0004 in</b> or less (all area)			0.02 mm <b>0.0008 in</b> or less (at 100 to 200 mm <b>3.937 to 7.874 in</b> sensing distance)
Supply voltage		12 to 24 V DC ±10 % Ripple P-P 10 % or less			
Current consumption		Emitter: 10 mA or less, Receiver: 10 mA or less		15 mA or less	
Output		<NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 26.4 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current)		<PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 26.4 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current)	
Output operation		Light-ON / Dark-ON selectable by the output operation switching input			
Short-circuit protection		Incorporated (short-circuit protection / inverse polarity protection)			
Response time		0.5 ms or less			
Operation indicator		Orange LED (lights up when the output is ON) (incorporated on the receiver for thru-beam type)			
Stability indicator		Green LED (lights up under stable light received condition or stable dark condition) (incorporated on the receiver for thru-beam type)			
Power indicator		Green LED (lights up when the power is ON) (incorporated on the emitter)			
Automatic interference prevention function		Incorporated (Two sensors can be mounted close together.)			
Sensitivity adjuster		Continuously variable adjuster (incorporated on the receiver)		Continuously variable adjuster	
Environmental resistance	Protection	IP67 (IEC)			
	Ambient temperature	-10 to +55 °C <b>+14 to +131 °F</b> (No dew condensation or icing allowed), Storage: -30 to +70 °C <b>-22 to +158 °F</b>			
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH			
	Ambient illuminance	Incandescent light: 3,000 lx at the light-receiving face			
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure			
	Insulation resistance	20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure			
	Vibration resistance	10 to 500 Hz frequency, 1.5 mm <b>0.059 in</b> amplitude (10 G max.) in X, Y and Z directions for two hours each			
Shock resistance	500 m/s <sup>2</sup> acceleration (50 G approx.) in X, Y and Z directions for three times each				
Emitting element		Red semiconductor laser Class 1 (IEC / JIS / FDA) (Note 5) (Maximum output: <b>EX-L221</b> □ <b>EX-L212</b> □ 390 μW, <b>EX-L291</b> □ 0.5 mW, <b>EX-L221</b> □ 2 mW, Peak emission wavelength: 655 nm <b>0.026 mil</b> )			
Material		Enclosure: Polybutylene terephthalate, Front cover: Acrylic, Lens: Glass			
Cable		0.15 mm <sup>2</sup> 4-core (emitter of a thru-beam type: 2-core) cabtyre cable, 2 m <b>6.562 ft</b> long			
Cable extension		Extension up to total 50 m <b>164.042 ft</b> is possible with 0.3 mm <sup>2</sup> , or more, cable (thru-beam type: both emitter and receiver).			
Weight		Net weight: Emitter; 40 g approx., Receiver; 40 g approx., Gross weight: 90 g approx.		Net weight: 45 g approx., Gross weight: 60 g approx.	
Accessory		<b>MS-EXL2-2</b> (Metal plate): 2 pcs.		<b>RF-330</b> (Reflector): 1 pc. <b>MS-EXL2-3</b> (Metal plate): 1 pc.	<b>MS-EXL2-3</b> (Metal plate): 1 pc.

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.  
 2) The sensing range is the value for **RF-330** reflector. The sensing range represents the actual sensing range of the sensor. The sensing ranges itemized in "A" of the table below may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.



	<b>RF-330</b> (Accessory)	With <b>PF-EXL2-1</b> polarizing filters *1	<b>RF-210</b> (Optional)	With <b>PF-EXL2-1</b> polarizing filters *1
A	0 to 4 m <b>0 to 13.123 ft</b>	0 to 4 m <b>0 to 13.123 ft</b>	0 to 1.8 m <b>0 to 5.906 ft</b>	0 to 1.2 m <b>0 to 3.937 ft</b>
B	0.2 to 4 m <b>0.656 to 13.123 ft</b>	0.4 to 4 m <b>1.312 to 13.123 ft</b> *2	0.16 to 1.8 m <b>0.525 to 5.906 ft</b>	0.25 to 1.2 m <b>0.820 to 3.937 ft</b> *2

\*1 Refer to "OPTIONS" for the polarizing filter **PF-EXL2-1** and the reflector **RF-210**.  
 \*2 When positioning the reflector nearby, the angular characteristic become more narrow. Adjust the angle of a sensor or reflector.


- EX-L212** □: In the case sensing distance is 3 m **9.843 ft**, the emission spot size is H 17 × W 11 mm **H 0.669 × W 0.433 in** (visual reference value).  
**EX-L291** □: In the case sensing distance is 4 m **13.123 ft**, the emission spot size is H 18 × W 10 mm **H 0.709 × W 0.394 in** (visual reference value).
- Typical values when the sensitivity adjuster is optimally adjusted.
- This product complies with 21 CFR 1040.10 and 1040.11 Laser Notice No. 50, dated June 24, 2007, issued by CDRH (Center for Devices and Radiological Health) under the FDA (Food and Drug Administration). For details, refer to the Laser Notice No. 50.

**OPTIONS**

Designation	Model No.	Description
Sensor mounting bracket	<b>MS-EXL2-1</b>	Foot angled mounting bracket (The thru-beam type sensor needs two brackets.)
Universal sensor mounting bracket	<b>MS-EXL2-4</b>	It can adjust the height and the angle of the sensor. (The thru-beam type sensor needs two brackets.)
Polarizing filter	<b>PF-EXL2-1</b>	Polarizing filter for retroreflective type Stabilizes sensitivity of the reflective surface.
Reflector	<b>RF-210</b>	For retroreflective type <b>EX-L291</b> □ Sensing range: 1.8 m <b>5.906 in</b> (Note)
Reflector mounting bracket	<b>MS-RF21-1</b>	Protective mounting bracket for <b>RF-210</b> It protects the reflector from damage and maintains alignment.


Note: Set the distance between the reflector and sensor to be at least 0.16 m **0.525 in**. Refer to "ORDER GUIDE" for details.

**Sensor mounting bracket**  
· **MS-EXL2-1**




Material: Stainless steel (SUS304)  
Two M3 (length 14 mm **0.551 in**) screws with washers [stainless steel (SUS304)] are attached.

**Universal sensor mounting bracket**  
· **MS-EXL2-4**




Material: Die-cast zinc alloy

**Polarizing filter**  
· **PF-EXL2-1**




Material: Stainless steel (SUS304)

**Reflector**  
· **RF-210**



**Reflector mounting bracket**  
· **MS-RF21-1**




Two M3 (length 12 mm **0.472 in**) screws with washers are attached.

**I/O CIRCUIT DIAGRAMS**

**NPN output type**

**I/O circuit diagrams**

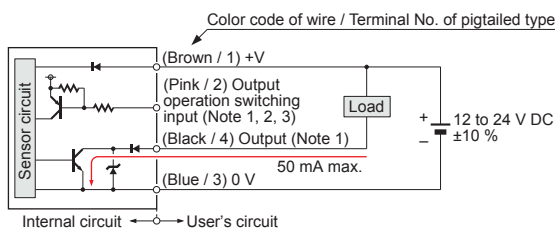


- Notes: 1) The emitter of a thru-beam type does not incorporate output (black / 4) and output operation switching input (pink / 2).  
2) Be able to select either Light-ON or Dark-ON by wiring the output operation switching input (pink / 2) as shown in the following table.

Type	Light-ON	Dark-ON
Thru-beam, Retroreflective	Connect to 0 V	Connect to + V or, Open
Spot reflective	Connect to + V or, Open	Connect to 0 V

\* Insulate the output operation switching input wire (pink / 2) when leaving it open.

- 3) When connecting the mating cable to the pigtailed type, color code of wire is "white".


**Connector pin position (pigtailed type)**



Note: The emitter of a thru-beam type does not incorporate output and output operation switching input.

**PNP output type**

**I/O circuit diagrams**

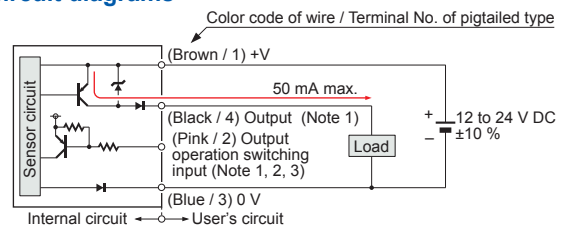


- Notes: 1) The emitter of a thru-beam type does not incorporate output (black / 4) and output operation switching input (pink / 2).  
2) Be able to select either Light-ON or Dark-ON by wiring the output operation switching input (pink / 2) as shown in the following table.

Type	Light-ON	Dark-ON
Thru-beam, Retroreflective	Connect to 0 V	Connect to + V or, Open
Spot reflective	Connect to + V or, Open	Connect to 0 V

\* Insulate the output operation switching input wire (pink / 2) when leaving it open.

- 3) When connecting the mating cable to the pigtailed type, color code of wire is "white".

**Connector pin position (pigtailed type)**



Note: The emitter of a thru-beam type does not incorporate output and output operation switching input.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC CONTROL DEVICES

ENDOSCOPE

LASER MARKERS

PLC / TERMINALS

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Amplifier-separated


EX-L200




**SENSING CHARACTERISTICS (TYPICAL)**

FIBER SENSORS  
LASER SENSORS  
PHOTO-ELECTRIC SENSORS  
MICRO PHOTO-ELECTRIC SENSORS  
AREA SENSORS  
LIGHT CURTAINS  
PRESSURE / FLOW SENSORS  
INDUCTIVE PROXIMITY SENSORS  
PARTICULAR USE SENSORS  
SENSOR OPTIONS  
SIMPLE WIRE-SAVING UNITS  
WIRE-SAVING SYSTEMS  
MEASUREMENT SENSORS  
STATIC CONTROL DEVICES  
ENDOSCOPE  
LASER MARKERS  
PLC / TERMINALS  
HUMAN MACHINE INTERFACES  
ENERGY CONSUMPTION VISUALIZATION COMPONENTS  
FA COMPONENTS  
MACHINE VISION SYSTEMS  
UV CURING SYSTEMS  
Selection Guide  
Amplifier Built-in  
Amplifier-separated  
EX-L200


**EX-L211** Thru-beam type

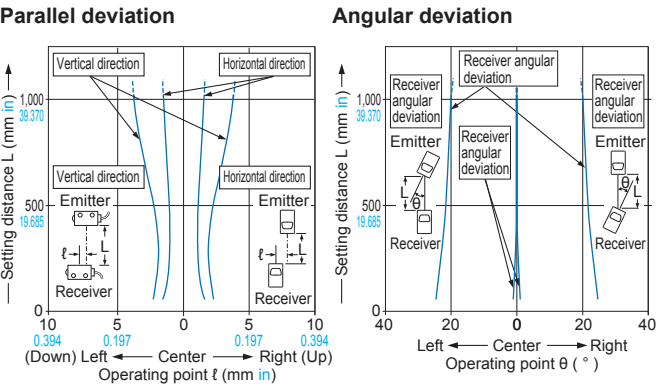


**EX-L212** Thru-beam type

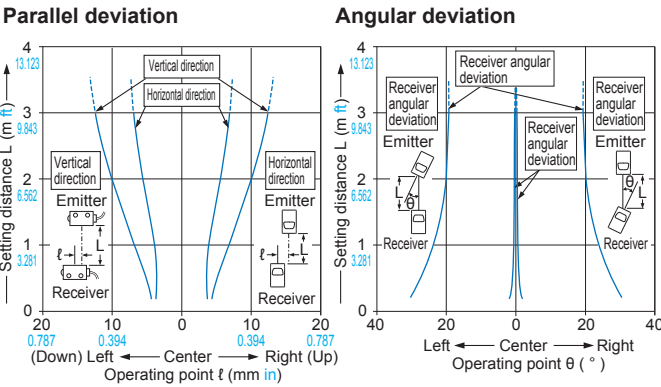


**EX-L291** Retroreflective type

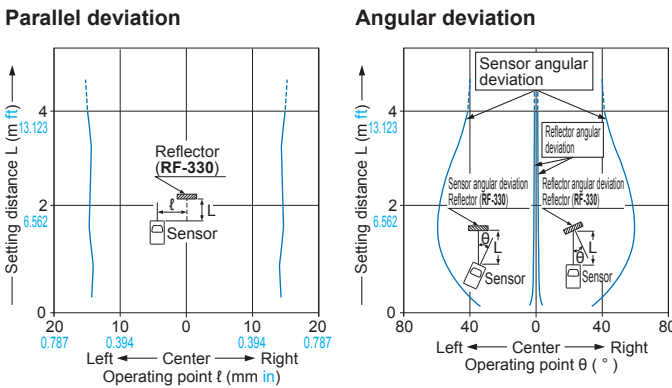

**EX-L221** Spot reflective type

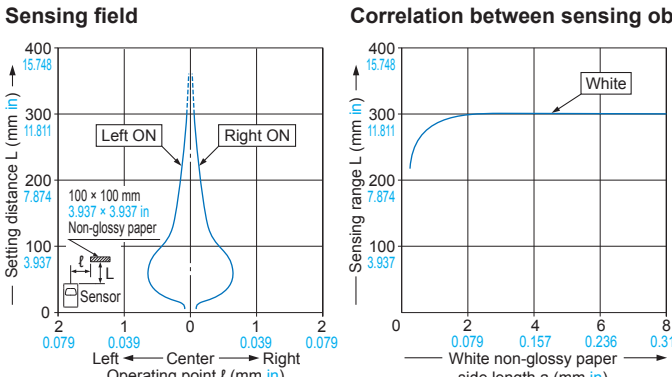

As the sensing object size becomes smaller than the standard size (white non-glossy paper 100 × 100 mm 3.937 × 3.937 in), the sensing range shortens, as shown in the left graph.  
(For plotting the left graph, the sensitivity has been set such that a 100 × 100 mm 3.937 × 3.937 in white non-glossy paper is just detectable at a distance of 300 mm 11.811 in.)

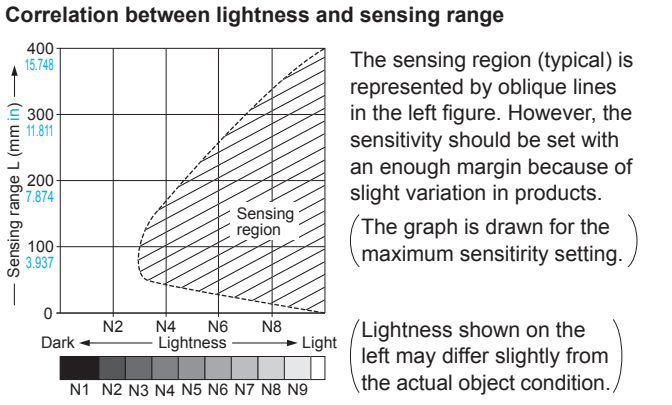

The sensing region (typical) is represented by oblique lines in the left figure. However, the sensitivity should be set with an enough margin because of slight variation in products.  
(The graph is drawn for the maximum sensitivity setting.)  
(Lightness shown on the left may differ slightly from the actual object condition.)

**PRECAUTIONS FOR PROPER USE**

Refer to General precautions and About laser beam.

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICES

ENDOSCOPE

LASER  
MARKERSPLC /  
TERMINALSHUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
GuideAmplifier  
Built-inAmplifier-  
separated

EX-L200


- This catalog is a guide to select a suitable product. Be sure to read the instruction manual attached to the product prior to its use.




- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

**Cautions for laser beams**

- This product is classified as a Class 1 Laser Product in IEC / JIS / FDA regulations 21 CFR 1040.10 and 1040.11. Do not look at the laser beam through optical system such as a lens.
- The following label is attached to the cable. Handle the product according to the instruction given on the warning label.




Proof label




Warning label

**Mounting**


- When mounting this sensor, use a mounting plate (**MS-EXL2-2**, **MS-EXL2-3**). Without using the mounting plate, beam misalignment may occur. Also, install the mounting plate in between the sensor and the mounting surface.
  - The tightening torque should be 0.5 N·m or less.
- Note: The mounting direction of the mounting plate is fixed. Install in a way so that the bending shape is facing the sensor side.

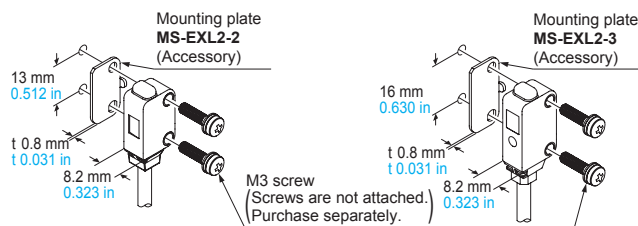**EX-L21****EX-L291 / EX-L221****Automatic interference prevention function**

- Spot reflective type sensor incorporate this function. Up to two sets of sensor can be mounted closely. (Thru-beam type sensor does not have this function.)

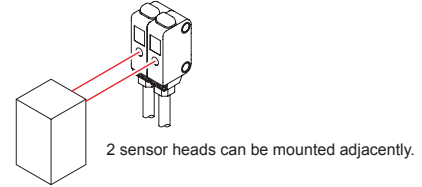

Note: If two spot reflective type sensor are mounted facing each other, they should be angled so as not to receive the beam from the opposing sensor or to detect its front face.

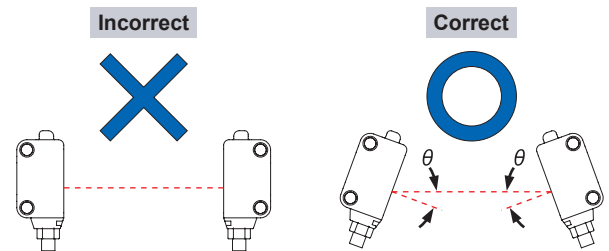**Others**


- Do not use during the initial transient time (approx. 50ms) after the power supply is switched ON.
- In case the load and this sensor are connected to different power supplies, be sure to turn ON the power from the sensor.
- The cable may break by applying excess stress in low temperature.
- Do not allow any water, oil fingerprints, etc., which may refract light, or dust, dirt, etc., which may block light, to stick to the emitting / receiving surfaces of the sensor head. In case they are present, wipe them with a clean, soft cloth or lens paper. Do not use this sensor in places having excessive vapor, dust, etc., or where it may come in contact with corrosive gas.
- Take care that the sensor does not come in direct contact with oil, grease, organic solvents, such as thinner etc., or strong acid, and alkaline.
- Make sure that the power is OFF while cleaning the emitting / receiving windows of the sensor head.
- This device is using a laser which has high directional quality. Therefore the beam possibly be out of alignment by the mounting condition of this device or distortion of housing etc. Make sure to adjust the beam axe alignment before use.

FIBER SENSORS
LASER SENSORS
PHOTO-ELECTRIC SENSORS
MICRO PHOTO-ELECTRIC SENSORS
AREA SENSORS
LIGHT CURTAINS
PRESSURE / FLOW SENSORS
INDUCTIVE PROXIMITY SENSORS
PARTICULAR USE SENSORS
SENSOR OPTIONS
SIMPLE WIRE-SAVING UNITS
WIRE-SAVING SYSTEMS
MEASUREMENT DEVICES
STATIC CONTROL DEVICES
ENDOSCOPE
LASER MARKERS
PLC / TERMINALS
HUMAN MACHINE INTERFACES
ENERGY CONSUMPTION VISUALIZATION COMPONENTS
FA COMPONENTS
MACHINE VISION SYSTEMS
UV CURING SYSTEMS

**DIMENSIONS (Unit: mm in)**


The CAD data in the dimensions can be downloaded from our website.

**EX-L211(-P) EX-L212(-P)** Sensor

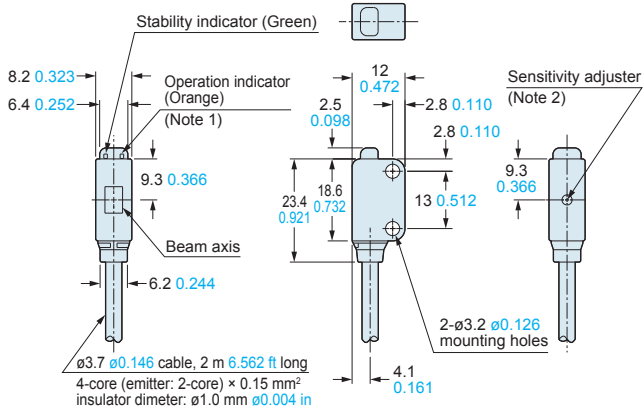


Notes: 1) It is the laser radiation indicator (green) on the emitter.  
2) It is incorporated in EX-L211(-P) only.

**EX-L211(-P)-J EX-L212(-P)-J** Sensor

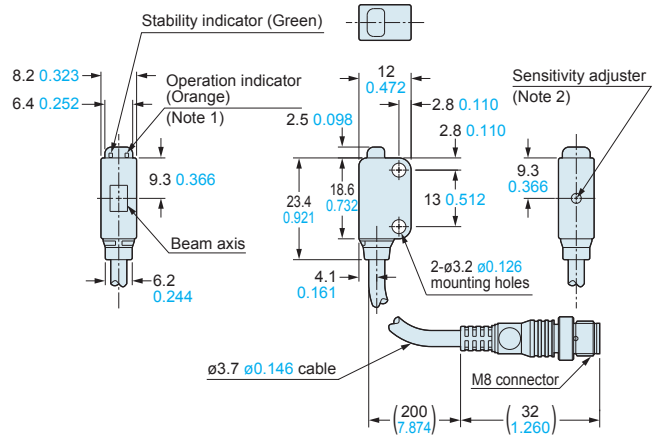


Notes: 1) It is the laser radiation indicator (green) on the emitter.  
2) It is incorporated in EX-L211(-P)-J only.

**EX-L291(-P)** Sensor

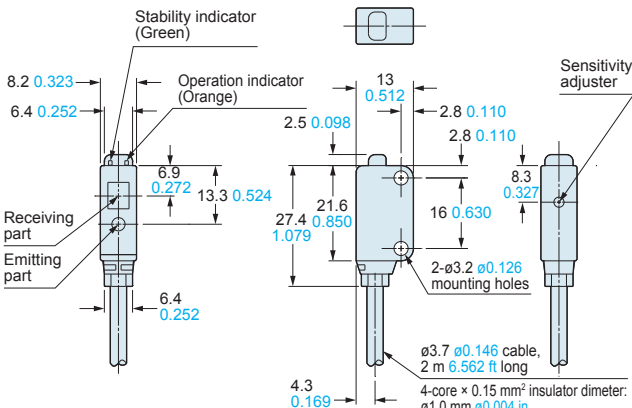


**EX-L291(-P)-J** Sensor

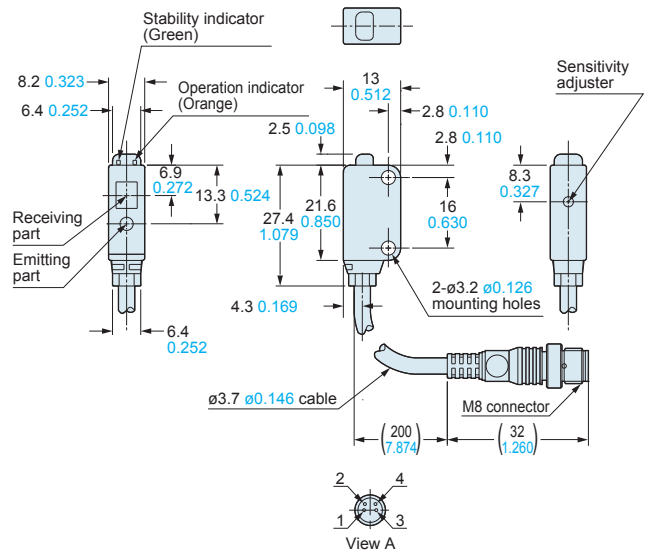


**Assembly dimensions with polarizing filter (PF-EXL2-1)**

Mounting drawing with EX-L291(-P)

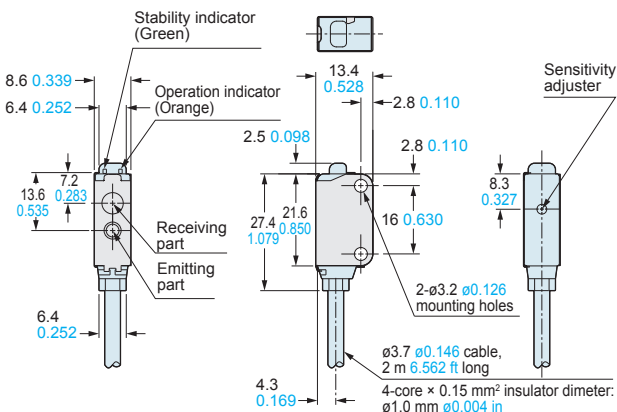

**RF-330** Reflector (Accessory for EX-L291□)

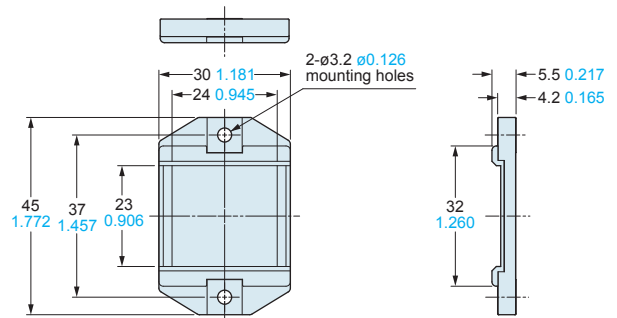


Material: Acrylic (Reflector)  
ABS (Base)

Selection Guide
Amplifier Built-in
Amplifier-separated
EX-L200


**DIMENSIONS (Unit: mm in)**

The CAD data in the dimensions can be downloaded from our website.


**EX-L221(-P)** Sensor

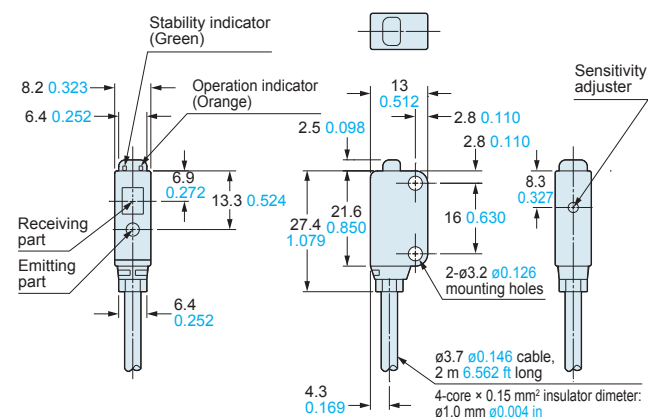

**EX-L221(-P)-J** Sensor

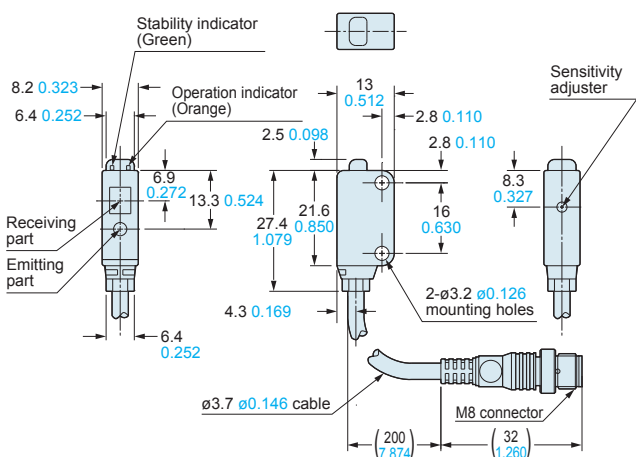


**MS-EXL2-1** Sensor mounting bracket (Optional)

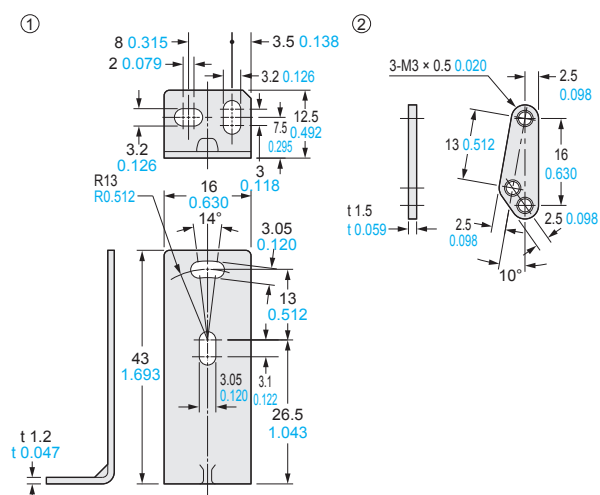


Material: Stainless steel (SUS304)  
Two M3 (length 14 mm 0.551 in) screws with washers [stainless steel (SUS304)] are attached.

**Assembly dimensions**


Mounting drawing with the receiver of EX-L21 □

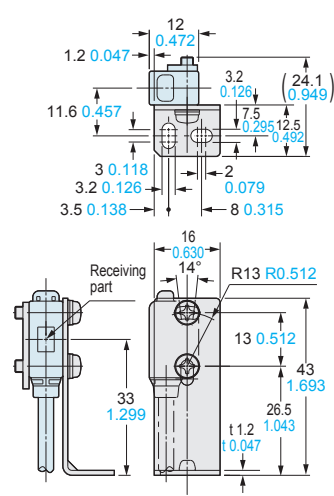

Mounting drawing with EX-L291 □ / L221 □

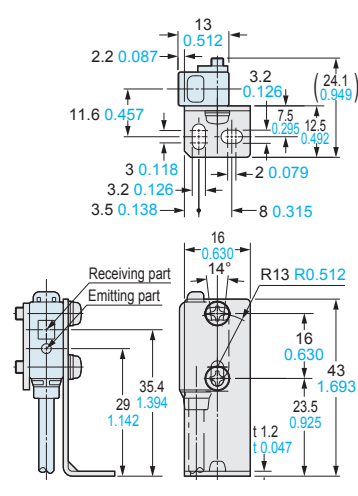


**MS-EXL2-2** Mounting plate (Accessory for EX-L21 □)

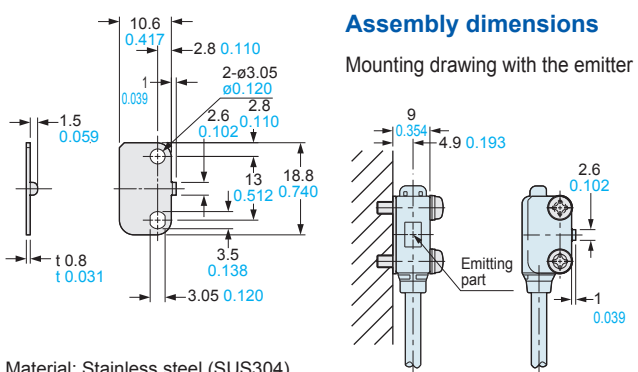

Material: Stainless steel (SUS304)  
Note: Screws are not attached. Purchase separately.  
\* Without using the mounting plate, beam misalignment may occur.

**MS-EXL2-3** Mounting plate (Accessory for EX-L291 □ / L221 □)

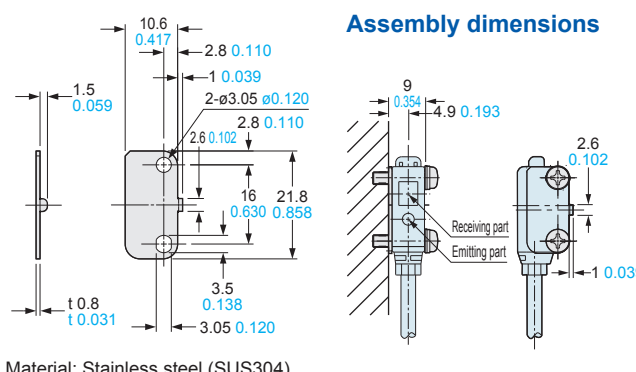

Material: Stainless steel (SUS304)  
Note: Screws are not attached. Purchase separately.  
\* Without using the mounting plate, beam misalignment may occur.



- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- LIGHT CURTAINS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- ENDOSCOPE
- LASER MARKERS
- PLC / TERMINALS
- HUMAN MACHINE INTERFACES
- ENERGY CONSUMPTION VISUALIZATION COMPONENTS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS
- Selection Guide
- Amplifier Built-in
- Amplifier-separated
- EX-L200

**DIMENSIONS (Unit: mm in)**


The CAD data in the dimensions can be downloaded from our website.

**MS-EXL2-4**

Universal sensor mounting bracket (Optional)

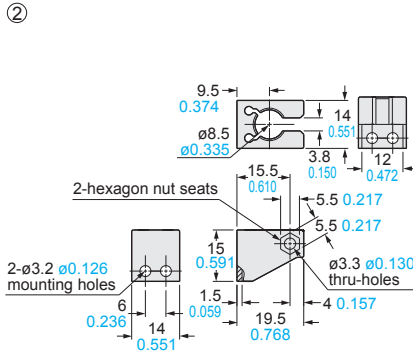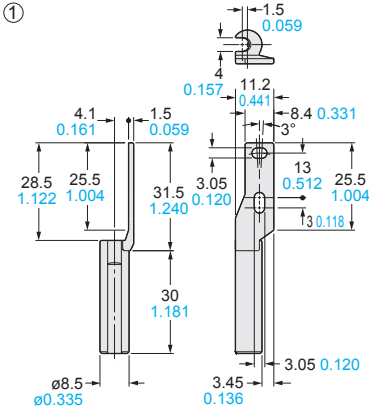

Material: Die-cast zinc alloy




Material: Stainless steel (SUS)

Material: Die-cast zinc alloy

Two M3 (length 14 mm 0.551 in) screws with washers, one M3 (length 10 mm 0.394 in) hexagon socket-head bolt [stainless steel (SUS)], and one M3 hexagon nut [stainless steel (SUS)] are attached.

**Assembly dimensions**


Mounting drawing with the receiver of EX-L211□

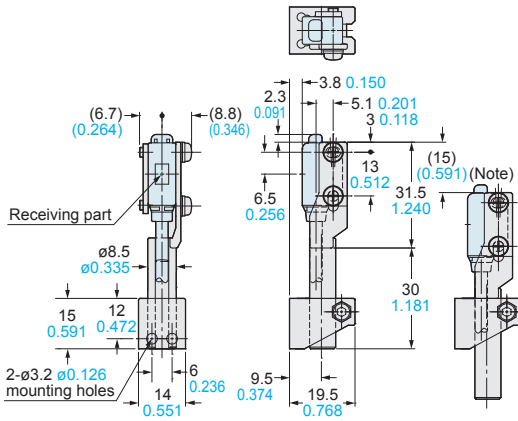

Note: This is the adjustable range of the movable part.

**Assembly dimensions**

Mounting drawing with EX-L221□

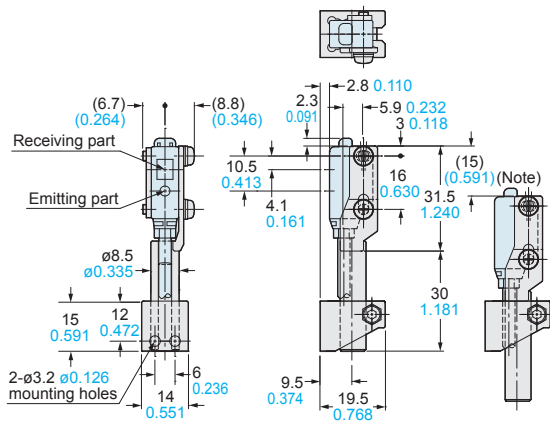

Note: This is the adjustable range of the movable part.

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC CONTROL DEVICES

ENDSCOPE

LASER MARKERS

PLC / TERMINALS

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Amplifier-separated

EX-L200